Machine Translated by Google

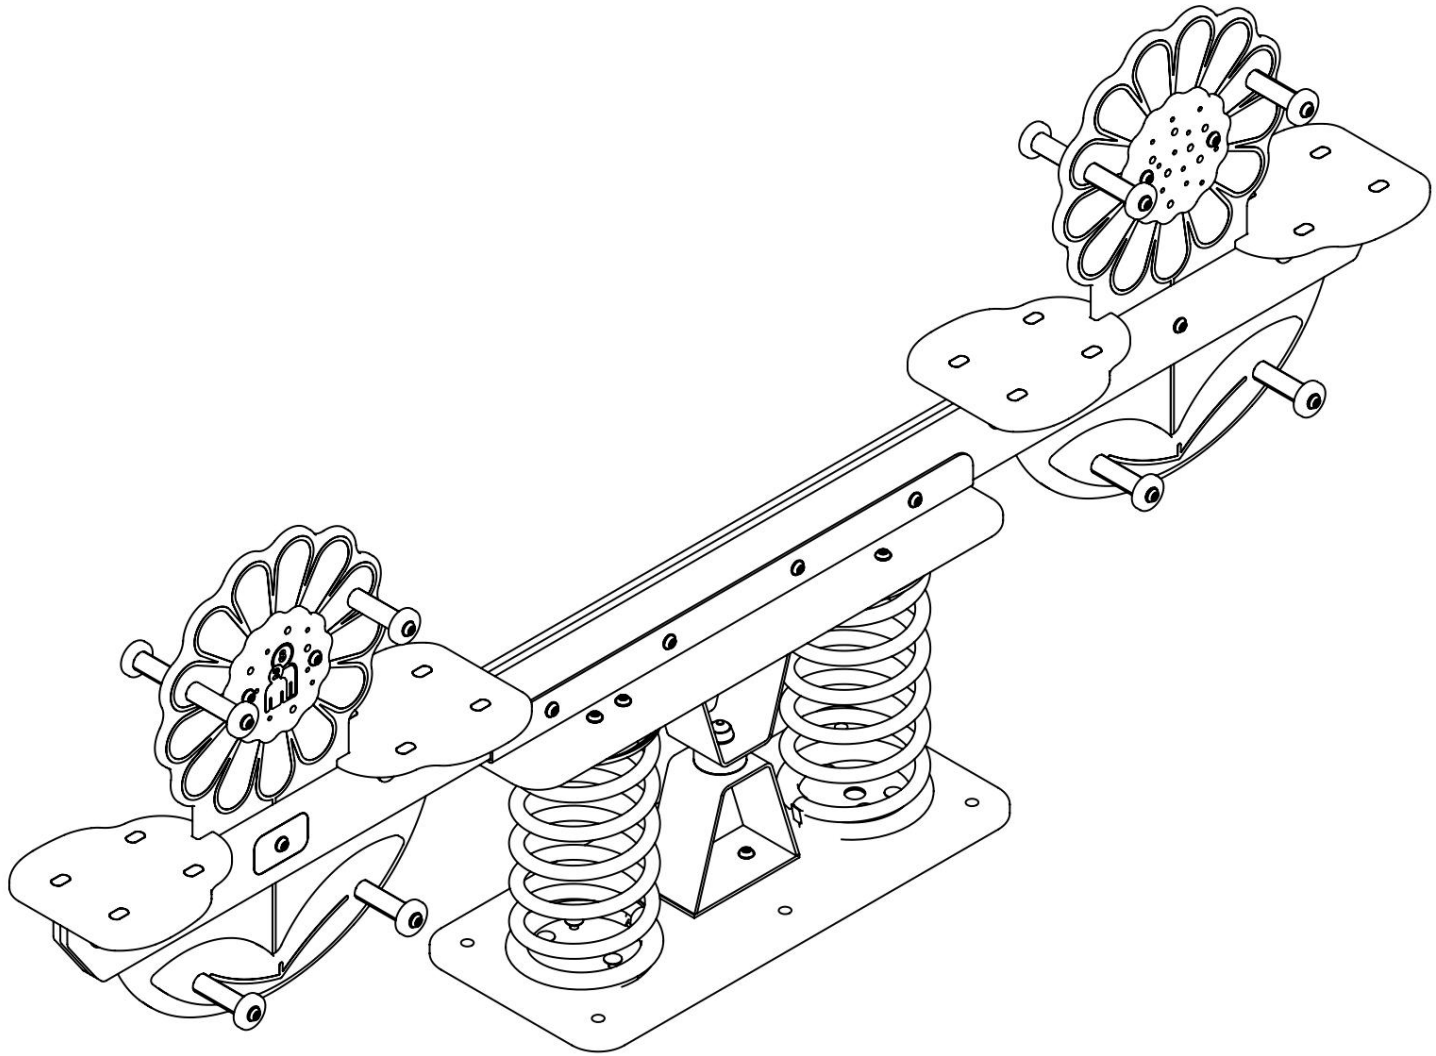

Do not distribute without authorization from QUALI-Cité®

Document prepared in accordance with the standards in force on 28/05/2024

Machine Translated by Google

RE 353-xx-A

Module Nomenclature at Spitter

N°	Code Article	DESIGNATION	Quantity	DESIGNATION 1	DESIGNATION 2	Index
1	M140002137	SPRING - Spring Assembly	2	00		b
2	M190010406	SPRING - SUSPENSION TRIANGLE	1	00		a
3	M190010503	MANUFACTURER'S PLATE 2017 - 3 HPL	1	00		a
4	M191310500	90° DOUBLE SPRING SEALING + SILENTBLOCK 2019 - A SPITTER	1	SPLITTER		a
5	M243622629	RE 353 - DECOR	1	xx		a

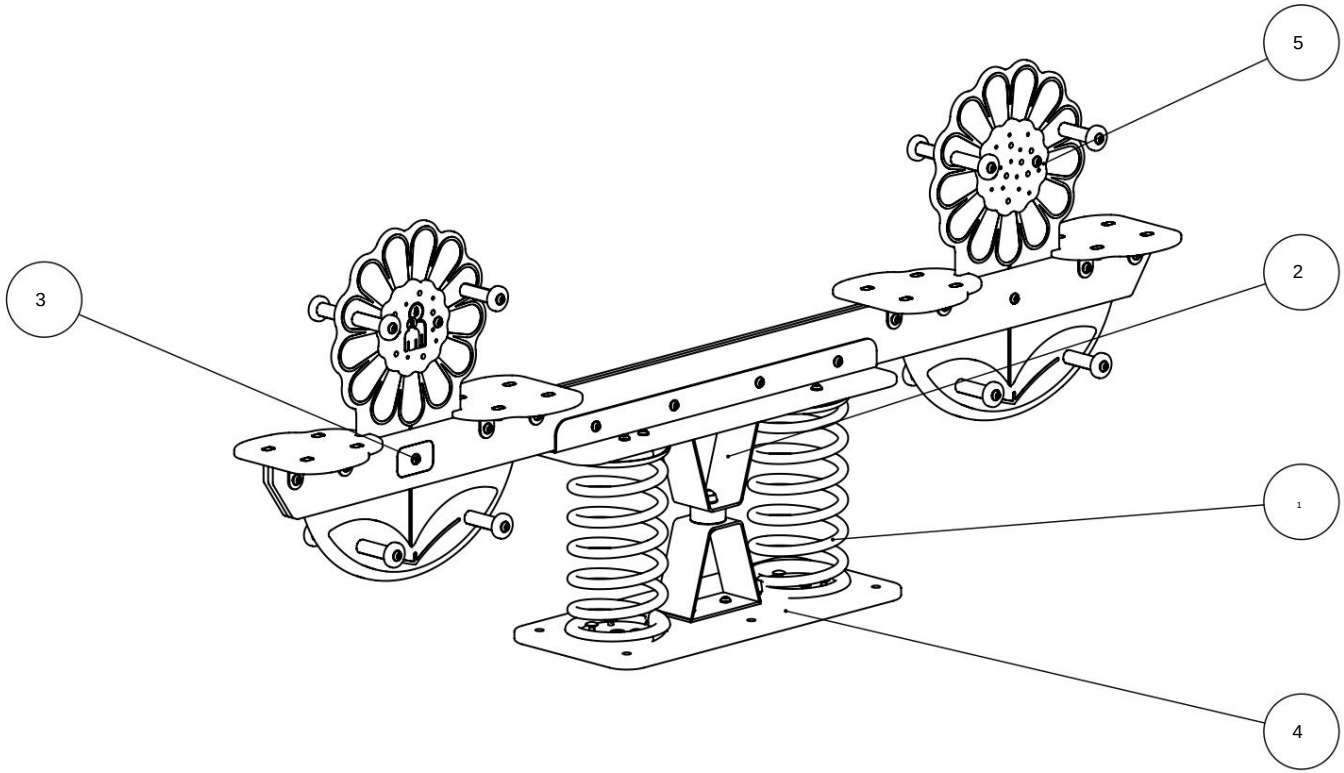

Copyright QUALI-Cité
Do not distribute without authorization from QUALI-Cité®

Machine Translated by Google

RE 353-xx-B

Nomenclature Modules Short Sealing

N°	Code Article	DESIGNATION	Quantity	DESIGNATION 1	DESIGNATION 2	Index
1	M140002137	SPRING - Spring Assembly	2	00		b
2	M190010406	SPRING - SUSPENSION TRIANGLE	1	00		a
3	M190010503	MANUFACTURER'S PLATE 2017 - 3 HPL	1	00		a
4	M191310504	90° DOUBLE SPRING SEALING + SILENTBLOCK 2019 - SHORT	1	COURT		b
5	M243622629	RE 353 - DECOR	1	xx		a

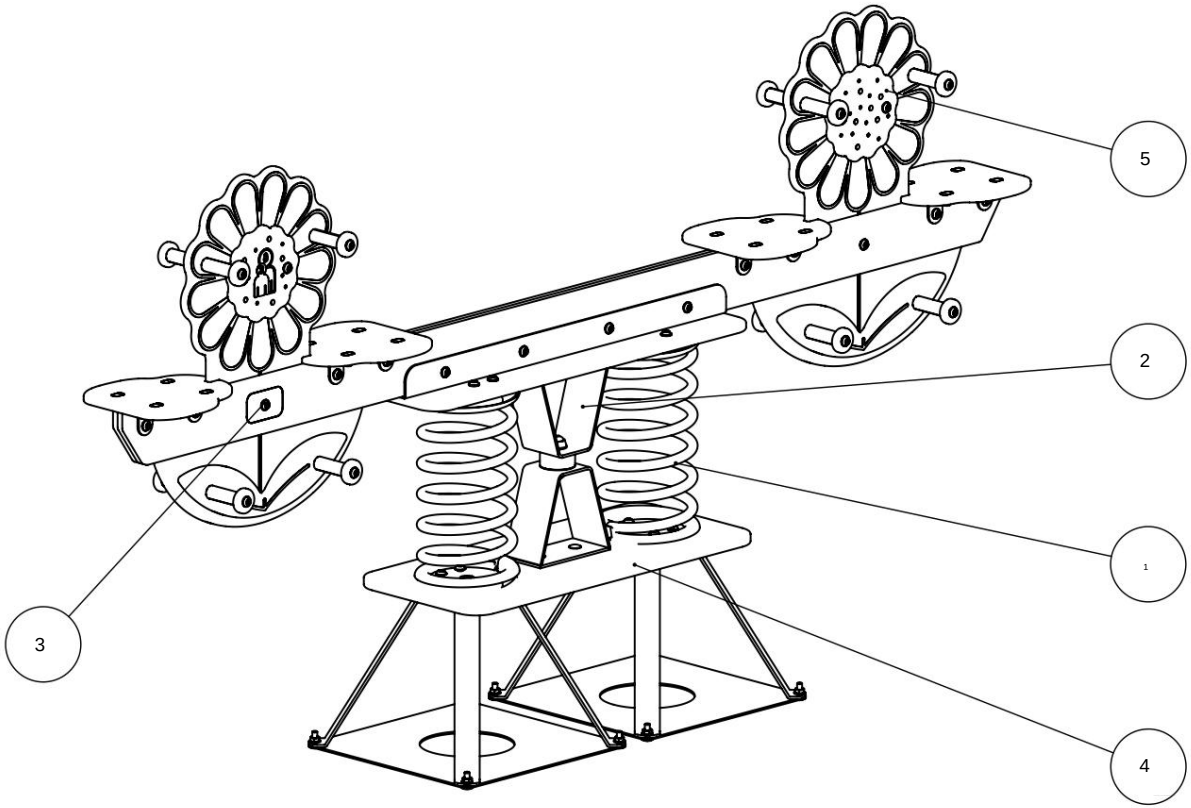

Copyright QUALI-Cité
Do not distribute without authorization from QUALI-Cité®

Machine Translated by Google

RE 353-xx-C

Nomenclature Modules Long Sealing

N°	Code Article	DESIGNATION	Quantity	DESIGNATION 1	DESIGNATION 2	Index
1	M140002137	SPRING - Spring Assembly	2	00		b
2	M190010406	SPRING - SUSPENSION TRIANGLE	1	00		a
3	M190010503	MANUFACTURER'S PLATE 2017 - 3 HPL	1	00		a
4	M191310506	90° DOUBLE SPRING SEALING + SILENTBLOCK 2019 - LONG	1	LONG		b
5	M243622629	RE 353 - DECOR	1	xx		a

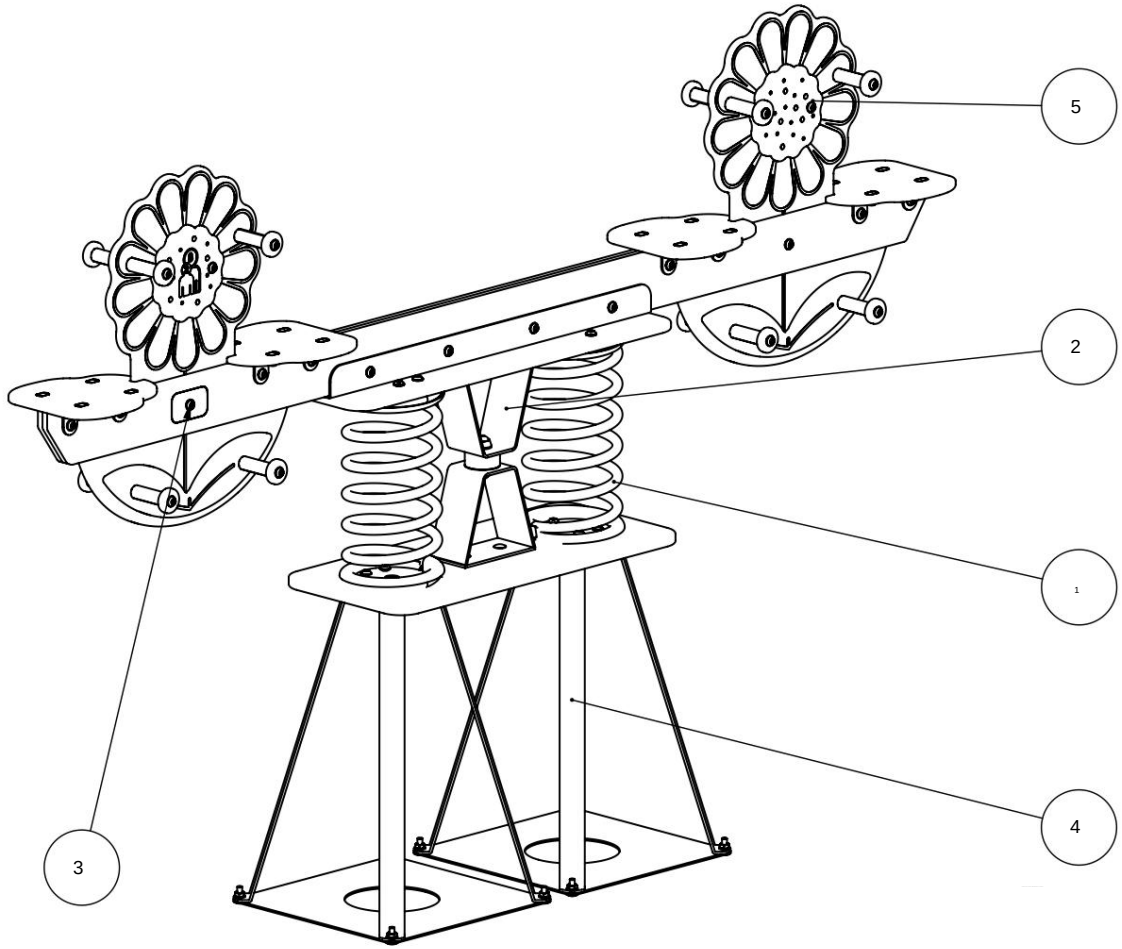

Copyright QUALI-Cité

Do not distribute without authorization from QUALI-Cité®

Machine Translated by Google

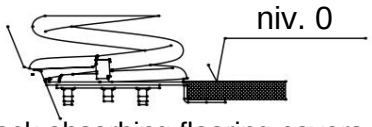

The shock-absorbing flooring covers
necessarily the mounting plate



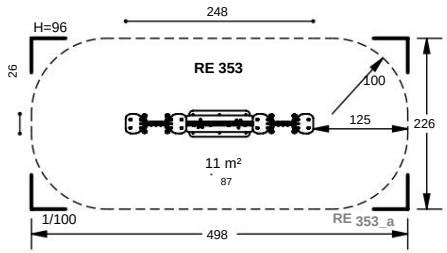

* Free fall height
EN 1176 normative reference
H: Total height of the equipment

Do not distribute without authorization from QUALI-Cité®

Document prepared in accordance with the standards in force on 28/05/2024

Machine Translated by Google

RE 353_a

PLAN D'IMPLANTATION

LEGEND

- Sealing stainless steel post I go.
- Sealing 80x80 door handle
- Sealing tube Ø42.4
- Sealing tube 50x50
- Sealing tube 45x45
- Sealing Boarding net
- Sealing Spring
- Sealing Carousel
- Sealing Direct
- Sealing tube 60x60
- Sealing Tob COOL
- Sealing Tob Post Spiral
- Sealing Toboggan Tunnel
- Sealing Type "HEXA" on the ground
- Sealing Tour AERIAL

FOR DETAILS ON SEALING, REFER TO THE CORRESPONDING FOUNDATION INSTRUCTIONS

COLOR CODES

A SOIL STUDY MUST BE ARRANGED IF NECESSARY.

Minimum soil resistance: 1.5 bar (15 t/m²)

Maximum wind load: 230km/h

Maximum snow load: 9.5kN/m²

IF THESE VALUES ARE EXCEEDED, PLEASE CONTACT THE ENGINEERING OFFICE TO REQUIRE FOUNDATION SIZES

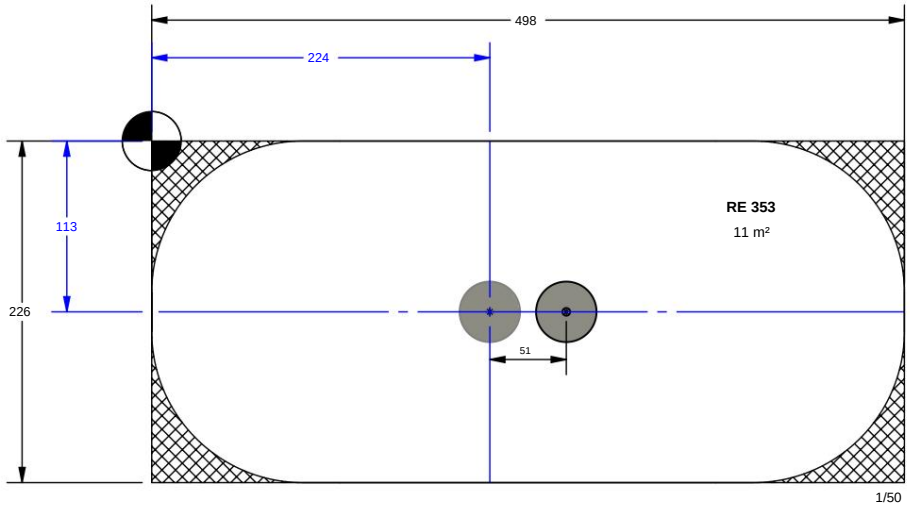

BEWARE OF THE HEAT RADIATED BY THE METAL PARTS SUNNY DAYS

SLIDE ORIENTATION
NORTH / NORTHEAST / NORTHWEST
EXCEPT FOR THE STARBOARD OPTION

Do not distribute without authorization from QUALI-Cité®

Document prepared in accordance with the standards in force on 28/05/2024